

Visual comparison

Functional comparison

Specification compared

E11



Front

E11K



Front


Top



Bottom



Sides

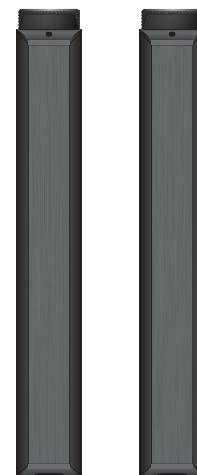

Visual comparison

Functional comparison

Specification compared

Output ports



3.5mm headphone out



3.5mm headphone out

Input ports




3.5mm line in




3.5mm line in

Volume



Analog volume pot



Analog volume pot

Gain switch



High and low gain (sliding switch)



High and low gain (flip switch)

Sound effect / bass boost switches



3 sound settings (off+2 EQs)



Two-position bass boost on-off flip switch

USB port



Mini USB port



Micro USB port

Others

No working while charging

Can work while charging

Battery replaceable

Battery not replaceable

Aluminium alloy top and bottom covers

All aluminium-alloy body and chassis

Visual comparison

Functional comparison

Specification compared

Model	E11	E11K
Maximum output power	180 mW@32Ω	450mW(16Ω); 270mW(32Ω)
Frequency response	20Hz~20KHz	20Hz~20KHz
Signal-to-noise ratio	>106dB	≥108dB
Crosstalk rejection	>59dB@1KHz	≥72dB
Gain settings	L/H	L/H
Bass	OFF/1/2	OFF/ON
Total Harmonic Distortion	<0.004%@1KHz	<0.004%
Battery Capacity	>800mAH	1400mAH
Charging time	<210min.	~240min.
Operating time	>10hr.	Up to 16hr. (at normal volume)
Recommended earphone impedance	16~150Ω	16~150Ω
Dimensions	92.5×54.2×13.4(mm)	91.2 x 56 x 13(mm)
Weight	65g(with battery)	92g(with battery)